





4" Cylinder


Junction Box Cover

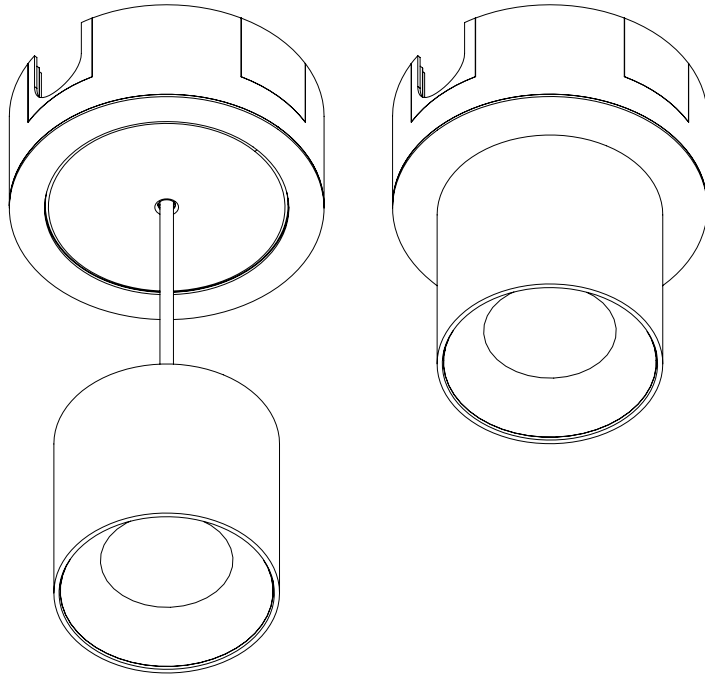


Junction Box Cover Includes



Junction Box Cover



Bracket Ring
(for Cord/Stem Mount only)



Bracket
(for Surface Mount only)



Knockout Cover
Closed (x4)



Knockout Cover
Open (x4)



20mm Screws
(x4)




O-Rings
(x2)

For use with DMF Lighting's 4" Cylinder in open ceiling applications only. Compatible with most 40 octagonal and 4S square junction boxes.



Pre-installation

- 1 Configure four sides of junction box cover to desired wiring using knockout covers. Junction box cover comes pre-installed with two open and two closed knockout covers.


Slide off undesired knockout cover to remove. Slide on desired knockout cover to install. Discard undesired knockout covers.

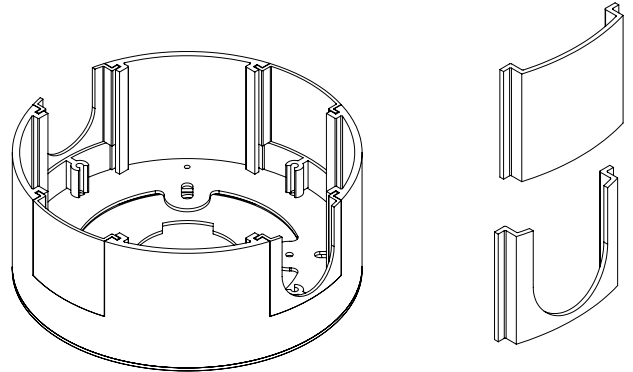

- 2 Align junction box cover onto junction box. Secure cover to junction box with two (2) screws.

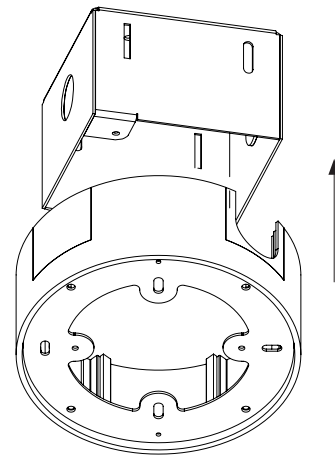


4S Square
Junction Box




40 Octagonal
Junction Box

Installation for Surface Mount Cylinder


- 1 Discard bracket included with cylinder and bracket ring included with junction box cover. Utilize bracket included with junction box cover.

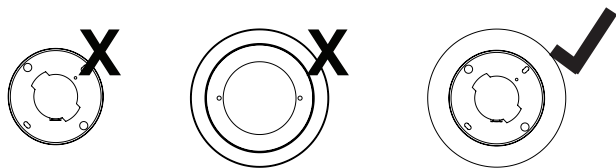

- 2 Align bracket to junction box cover. Secure bracket to cover with two (2) screws.

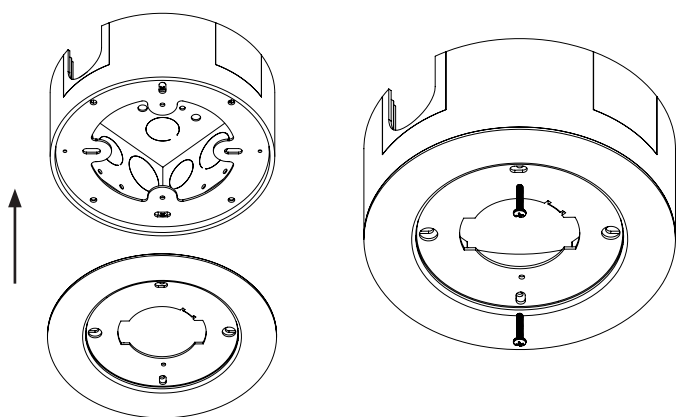


- 3 Complete surface mount cylinder installation following instructions from 4" Surface Mount LED Cylinder Installation Instructions.

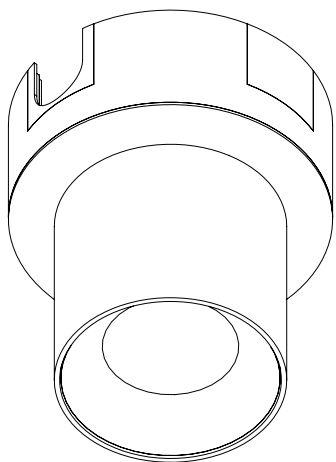


Installation for Cord/Stem Mount Cylinder


- 1 Discard bracket included with junction box Cover. Utilize Bracket included with cylinder and bracket ring included with junction box cover.

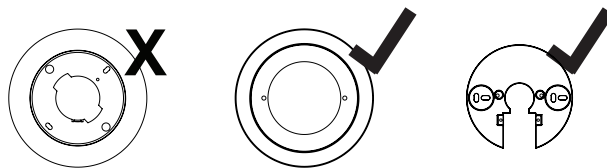

- 2 Align two (2) screws with two (2) O-rings into bracket and bracket ring.



- 3 Align bracket and bracket ring to junction box cover. Secure bracket to cover with two (2) screws.

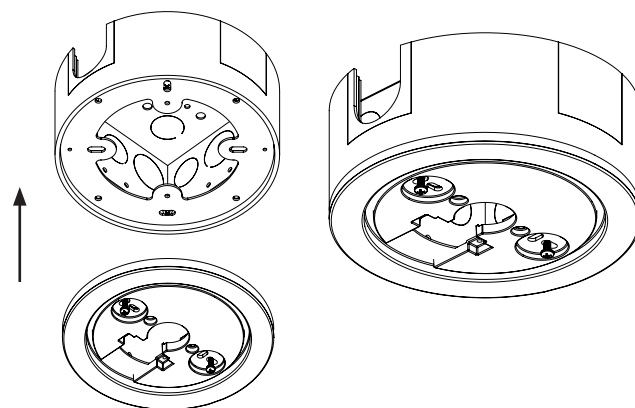

- 4 Complete cord/stem mount cylinder installation following instructions from appropriate 4" Cylinder Installation Instructions.

